

General Catalogue

13

the draught stopper



INDEX

History	p. 3
Reading guide	p. 4
Certifications	p. 5
OUR SERIES	p. 6
Pressure SERIES	p. 8
Cheap SERIES	p. 10
Special SERIES	p. 12
No Sound SERIES	p. 14
Comax SERIES	p. 16
Universal SERIES	p. 18
Showcases and sample	p. 19

COMAGLIO: DRAUGHT EXCLUDERS SINCE 1976.

Our company was founded in 1976 bringing draught excluders to Italy. Thirty years after that first historical patent and thanks to the experience of three generations, Comaglio continues its family business, but its products are now of international fame. From the garage workshop where Aldo Comaglio created the first Italian prototype draught excluder, up to our modern premises of today, close to Lake Garda, craftsmanship and passion for the job have always fired our activities.

The first patent foresaw only two applications serving also as a drip, then evolution became the basis for Comaglio's creative engineering process. And so it was that in the early 1980s Comaglio, with a small staff, opened a factory in Gavardo (BS).

After the opening of an Italian market showing interest for this innovative product, the Comaglio draught excluder faced the international scenario at the start of the 90s. Business has grown in terms of staff, investments, technology and

solutions, customer care and satisfaction being still our main objective. For this reason, in 2002 we extended our premises in Muscoline (BS).

Our quest is to identify solutions with the greatest care for details, using innovative and flexible production lines for our offer to a market in continuous evolution.

Today in more than 20 countries throughout the world, Comaglio is a synonym for quality, precision and technology.

HOW TO CHOOSE A DRAUGHT EXCLUDER.

Comaglio's mission is to provide a solution to every customer's need. In this brief introduction, we wish to provide a key to your choice of the solution that meets your needs.

1 WHICH KIND OF DOOR?

The draught excluder can be mounted in all types of doors: wood, aluminium, PVC, steel and armoured. The material of which the door is composed is the fundamental factor in choosing the draught excluder. Different types of door require different types of draught excluder due to their differing dimensions and types of fixings.

2 WHICH MECHANISM?

The mechanism is the draught excluder motor. Two solutions are available:

DOUBLE ADJUSTMENT

The double adjustment mechanism, exclusively patented by our company, allows the regulation of both the descent and inclination of the mobile profile. Although being removable as usual, the mechanism guarantees a decisive and homogeneous pressure along the whole length of the draught excluder.

OBSCILLATING

The obscillating mechanism is technically more simple than the double adjustment but offers excellent performance in the hold, duration and control of profile movement with a lining that acts thanks to the combined function of two rigid levers.

3 CHECK THE SECTION.

Checking the necessary section is often the first step in choosing the right draught excluder. Both the height and the breadth of the draught excluder are fundamental indications for use of our products. Especially in particular applications such as internal doors, or doors in aluminium or PVC.

4 WHICH SEAL?

The choice of the most suitable seal is an ideal complement in maximising the performance of the draught excluder. The choice of seal design and materials is important not only for the floor contact of the mobile profile, but is also obligatory when the doors have to be certified.

5 WHICH FASTENING?

Various fastening systems are available: from the traditional type that can be removed, to time-saving pre-mounted screws, to wings for particular solutions. All systems are extremely functional and long-lasting. One's choice means to decide immediately which is the main need in terms of practicality and easy assembly, based on the type of door on which the draught excluder has to be mounted.

6 WHICH PUSH BUTTON?

The form and material of the push button are not only a question of aesthetics but - acting in combination with the rabbit - they optimise the function of the draught excluder without damaging the frame.



CERTIFICATION. CERTIFICATION OF COMAGLIO PRODUCTS.

Continuous investments in research and development are guaranteed by a certification process to provide customers with an answer that not only complies with market needs, but also legal standards, in order to obtain products respecting European directives. In this respect Comaglio products have been certified for the resistance of the frame to noise, fire and wear.



NOISE ABATEMENT

The reduction of external noise is one of the main features of a good door. To improve this characteristic it is fundamental to optimise the closing of the gap between door and floor. Thus the draught excluder represents an essential and necessary element in obtaining good results. In compliance with the standards UNI EN ISO 140, UNI EN ISO 717 and DIN 52 210, all our products have been certified with excellent results at Istituto Giordano and the IFT Institute of Rosenheim.

We have grouped all the draught excluders obtaining the best noise abatement results in our No Sound Series, but we are able to provide objective assessments for all other products on request. Given the importance of noise abatement certification in our sector, we have considered it important to verify the efficiency in this ambit of draught excluders belonging to the other series so we are able to provide customers with other useful elements of assessment..



AIR SEAL

The standards EN 1026, EN 1027 and EN 14351 impose the CE mark on all pedestrian entry doors in the European Community which must therefore necessarily comply with certain safety requirements and various quality standards.



FIRE RESISTANCE

The resistance of a door and draught excluder to fire and propagation of the same is contemplated by various directives. For this reason Comaglio draught excluders can be provided with linings that comply with the UL 94 standard, making them suitable for application on fire barrier doors.



LIFE CYCLE

The function of Comaglio draught excluders is guaranteed to be long-lasting. This is supported by the certification issued by Istituto Giordano which submitted catalogue items to 200,000 complete opening-closing movements of the door without finding any limitation of functions or other signs of wear and tear at the end of the test.

SERIES PRESSURE

1700 1770 MINI
1712 1800
1700 MINI 1813
1770 1830
1772

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

SERIES CHEAP

420 470 MINI
422 520
420 MINI 540
470
472

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

SERIES SPECIAL

AE 170/12
110 170/15
920 1370
120 475
270

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM

SERIES NO SOUND

ISOLA 1773 ACU
1370NS 1770 ACU
1770XNS 1800XNS
1770NS 1800NS

Available for doors:

- > ARMoured
- > WOOD
- > ALUMINIUM
- > STEEL

SERIES COMAX

1750 1050
1450 125SP
1255 126SP
1250 1151

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM
- > STEEL

SERIES UNIVERSAL

1375
1380
1350
1355
1360

Available for doors:

- > PVC
- > ARMoured
- > WOOD
- > ALUMINIUM



The **PRESSURE SERIES** is characterised by the Comaglio twin adjusting mechanism; It is a patented mechanism designed to perfectly close the gap between doors and floors. The downward pressure applied by the seal to the floor is equal across the full width of the door. This is essential for optimal sealing in normal conditions and particularly important in more difficult situations such as uneven floors, tiling etc...

The **CHEAP SERIES** offers a new third generation tilting mechanism. It works by branching off the double adjusting mechanism of the Pressure Series, since it moves the active function of the floor closing springs (which are limited now to a passive return function to 2 stiff levers that guarantee complete control of the moving profile and a controlled and even pressure to the floor.

The **SPECIAL SERIES** is designed for fixing to aluminium frames, where the small size of the seal is of major importance. It is therefore possible to find within this range, a number of products well adapted to most aluminium applications. The item ref AE, new in 2006, has been added to comply with new European regulations whilst guaranteeing a speedy installation and a perfect seal to the floor.

All **NO SOUND SERIES** have successfully passed acoustic testing in a recognised European test laboratory. The Comaglio mechanism with double adjustment, silicone hardware and reinforced profiles guarantees a perfect floor seal and therefore perfect sound insulation. It is possible to fit the this series with a silicon seal which is self-extinguishing and certified for use with on fire doors.

The **COMAX SERIES** is designed by Comaglio for the DIY market. This series offers the perfect combination: guaranteed functionality using Comaglio patented mechanisms and detailed attractive design thanks to a removable seal in black metallic finish with a cover plate and matching end-caps available in 7 finishes. Accessories and complete reversibility make this Comax range applicable to all types of doors. For more economical use, Comaglio suggests the item 1250 in brushed or paint finished aluminium and the new item 1050, screwed on or dual adhesive in coloured PVC.

The **UNIVERSAL SERIES** complete the range. Recent laws impose precise quality standards for doors, among which a certain air and water seal. The items in this series offer simple solutions, alternative to "classical" excluders and guarantee excellent results in thermal and acoustic insulation.

SERIES PRESSURE


> 1700 > 1712 > 1700 MINI > 1770 > 1772 > 1770 MINI > 1800 > 1813 > 1830

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

1700



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal

OPTIONS


- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal

Sound insulation certificated by Giordano n. 218979

1712



> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal
- "U" 12 mm. fixed profile

OPTIONS


- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal

Sound insulation certificated by Giordano n. 294098

1700 MINI



> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm 10
STANDARD PACKAGING: 50 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal with 4 pressure points

OPTIONS


- Round nylon push button
- Black brush 48x1100

FASTENING BY PRE-FITTED SCREWS

1770



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal

OPTIONS


- Round nylon push button
- Self-extinguishing silicon seal
- Self-threading screws for wood

Sound insulation certificated by Giordano n. 218979

1772



> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 40 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal
- "U" 12 mm. fixed profile

OPTIONS


- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal
- Self-threading screws for wood

Sound insulation certificated by Giordano n. 294098

1770 MINI



> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm 10
STANDARD PACKAGING: 50 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal with 4 pressure points

OPTIONS


- Round nylon push button
- Black brush 48x1100
- Self-threading screws for wood

FASTENING BY WINGS

1800



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm 10
STANDARD PACKAGING: 32 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal

OPTIONS

- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal


PVC VERSION

- "U" 12 mm. fixed profile (art. 1812)

1813



> PVC



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm 10
STANDARD PACKAGING: 32 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal


OPTIONS

- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal

1830



> ARMoured



STANDARD SIZES:
cm. 53-63-73-83- 93-103-113-123-133
reducible by cm 10
STANDARD PACKAGING: 32 pieces

COMPONENTS

- Brass hexagonal push button
- EPDM seal

OPTIONS

- Round nylon push button
- Black brush 48x1100
- Self-extinguishing silicon seal

SERIES CHEAP


> 420 > 422 > 420 MINI > 470 > 472 > 470 MINI > 520 > 540

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

420

(B)

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces




COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal

Sound insulation certificated by Giordano n. 218979

472

(B)

> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces




COMPONENTS	
	Round nylon push button
	EPDM seal
	"U" 12 mm. fixed profile
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal
	Self-threading screws for wood

Sound insulation certificated by Giordano n. 294098

470 MINI

(B)

> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces




COMPONENTS	
	Round nylon push button
	EPDM seal with 4 pressure points
OPTIONS	
	Brass hexagonal push button
	Self-threading screws for wood

Sound insulation certificated by Giordano n. 262912

422

(B)

> ARMoured
> WOOD
> PVC



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces



COMPONENTS	
	Round nylon push button
	EPDM seal
	"U" 12 mm. fixed profile
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal


Sound insulation certificated by Giordano n. 294098

FASTENING BY WINGS

520

(B)

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 32 pieces




COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal
PVC VERSION	
	"U" 12 mm. fixed profile (art. 512)

Sound insulation certificated by Giordano n. 218979

420 MINI

(B)

> ALUMINIUM
> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces




COMPONENTS	
	Round nylon push button
	EPDM seal with 4 pressure points
OPTIONS	
	Brass hexagonal push button
	Black brush 48x600

Sound insulation certificated by Giordano n. 262912

540

(B)

> ARMoured



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 32 pieces



COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Black brush 48x1100
	Self-extinguishing silicon seal


Sound insulation certificated by Giordano n. 218979

FASTENING BY PRE-FITTED SCREWS

470

(B)

> ARMoured
> WOOD



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces



COMPONENTS	
	Round nylon push button
	EPDM seal
OPTIONS	
	Brass hexagonal push button
	Self-extinguishing silicon seal
	Self-threading screws for wood

Sound insulation certificated by Giordano n. 218979

SERIES SPECIAL


> AE > 110 > 920 > 120 > 170/12 > 170/15 > 270 > 1370 > 475

FASTENING INSIDE EUROPEAN GROOVE

AE

DR

> ALUMINIUM



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	Double self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Self-extinguish wrapped silicon seal

Sound insulation certificated by Giordano n. 294098

170/12

B

> ALUMINIUM



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43-53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

Sound insulation certificated by Giordano n. 294098

170/15

B

> STEEL
> ALUMINIUM



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43-53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Self-extinguishing silicon seal
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

Sound insulation certificated by Giordano n. 294098

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

110

> ALUMINIUM




STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 15
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 60 pieces

COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Black brush 48x1100
OPTIONS	
<input checked="" type="checkbox"/>	EPDM seal

270

B

> ALUMINIUM
> PVC




STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 30 pieces

COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	2 neoprene seals
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button

920

B

> WOOD




STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 10
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 50 pieces

COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	EPDM seal with 4 pressure points
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	Black brush 48x600
PRE-FITTED SCREWS VERSION	
<input checked="" type="checkbox"/>	Self-threading pre-fitted screws for wood (art. 970)

1370

DR

> ALUMINIUM
> PVC



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 30 pieces


COMPONENTS	
<input type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	2 neoprene seals
OPTIONS	
<input type="checkbox"/>	Round nylon push button

FASTENING BY PRE-FITTED SCREWS

120

B

> ALUMINIUM




STANDARD SIZES:
cm. 33 reducible by cm. 8
cm. 43 reducible by cm. 12
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 32 pieces

COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	Double EPDM seal
<input checked="" type="checkbox"/>	Double possible position of seal
OPTIONS	
<input type="checkbox"/>	Brass round push button

475

B

> ARMOURED



STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 63-83-103-123-133
reducible by cm. 20
STANDARD PACKAGING: 40 pieces

COMPONENTS	
<input type="checkbox"/>	Round nylon push button
<input checked="" type="checkbox"/>	EPDM seal
OPTIONS	
<input type="checkbox"/>	Brass hexagonal push button
<input checked="" type="checkbox"/>	Black brush 48x1100
<input checked="" type="checkbox"/>	Self-extinguishing silicon seal

LATERAL FASTENING

SERIES NO SOUND


> ISOLA > 1370NS > 1770XNS > 1770NS > 1773ACU > 1770ACU > 1800XNS > 1800NS

TRADITIONAL FASTENING BY MOVING INTERNAL PROFILE

ISOLA



> WOOD



STANDARD SIZES:
cm. 43 reducible by cm. 12
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 24 pieces

COMPONENTS

- Brass hexagonal push button
- 3 silicon seals

OPTIONS


- Round nylon push button

IFT Certificate n. 167 18460

1773 ACU



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS

- Round nylon push button
- Self-threading screws for wood


Sound insulation certificated by Giordano n. 294098

FASTENING BY PRE-FITTED SCREWS

1370 NS



> STEEL
> ALUMINIUM
> ARMoured



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 25 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS


- Round nylon push button

Sound insulation certificated by Giordano n. 294098

1800 XNS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS

- Round nylon push button


Sound insulation certificated by Giordano n. 294098

FASTENING BY WINGS

1770 XNS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS


- Round nylon push button
- Self-threading screws for wood

Sound insulation certificated by Giordano n. 294098

1800 NS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS


- Round nylon push button

IFT Certificate n. 167 19336/1

1770 NS



> ARMoured
> WOOD



STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 28 pieces

COMPONENTS

- Brass hexagonal push button
- Self-extinguishing silicon seal

OPTIONS

- Round nylon push button
- Self-threading screws for wood


IFT Certificate n. 167 19336/1

SERIES COMAX


> 1750 > 1450 > 1255 > 1250 > 1050 > 125SP > 126SP > 1151

1050

> DO IT YOURSELF



STANDARD SIZES:
cm. 100
STANDARD PACKAGING: 15 pieces

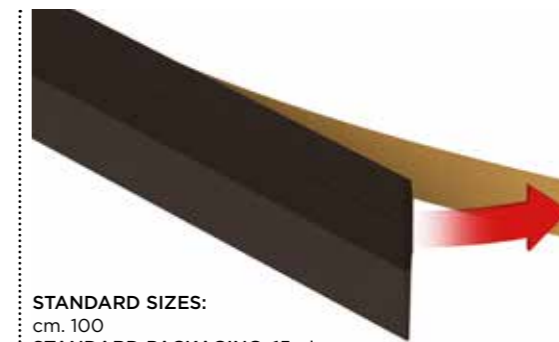


COMPONENTS
Fastening by adhesive
AVAILABLE FINISHES
White and brown

AUTOMATIC DRAUGHT EXCLUDER

1750

DR

> DO IT YOURSELF




STANDARD SIZES:
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 10
STANDARD PACKAGING: 10 pieces

COMPONENTS
<ul style="list-style-type: none"> Semi-circular push button EPDM seal
OPTIONS
<ul style="list-style-type: none"> Black brush 48x1100
AVAILABLE FINISHES
Cover plate and matching end-caps available in 7 finishes: aodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, BROWN RAL 8017
<ul style="list-style-type: none"> Sound insulation certificated by Giordano n. 218979

125SP

> DO IT YOURSELF




STANDARD SIZES:
cm. 100-300
STANDARD PACKAGING: 10 pieces

BRUSH SIZE
mm. 30 (125SP30)
mm. 40 (125SP40) - see drawing
mm. 50 (125SP50)
mm. 60 (125SP60)

1450

B

> DO IT YOURSELF





STANDARD SIZES:
cm. 33 reducible by cm. 7
cm. 43 reducible by cm. 13
cm. 53-63-73-83-93-103-113-123-133
reducible by cm. 20
STANDARD PACKAGING: 10 pieces

COMPONENTS
<ul style="list-style-type: none"> Semi-circular push button EPDM seal
AVAILABLE FINISHES
Cover plate and matching end-caps available in 7 finishes: aodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, brown RAL 8017

126SP

> DO IT YOURSELF

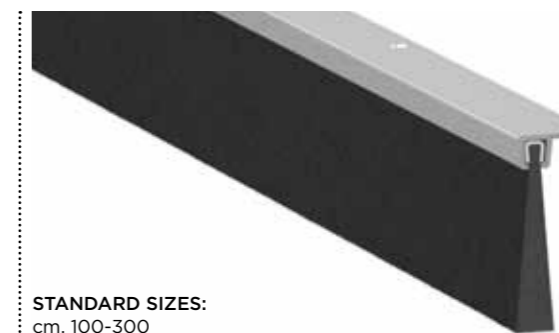


STANDARD SIZES:
cm. 100-300
STANDARD PACKAGING: 10 pieces

BRUSH SIZE
mm. 17 (126SP17)
mm. 27 (126SP27) - see drawing
mm. 37 (126SP37)

FIXED DRAUGHT EXCLUDER

1255

> DO IT YOURSELF




STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS
<ul style="list-style-type: none"> Black brush 48x1100
OPTIONS
<ul style="list-style-type: none"> EPDM seal
AVAILABLE FINISHES
Cover plate and matching end-caps available in 7 finishes: aodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, brown RAL 8017

1151

> DO IT YOURSELF




STANDARD SIZES:
cm. 80-100-120-140-160-180-200-220-240
STANDARD PACKAGING: 10 pieces

COMPONENTS
<ul style="list-style-type: none"> Black brush 48x900 Black brush 48x1600
AVAILABLE FINISHES
Profile and matching end-caps available in 7 finishes: aodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, brown RAL 8017

1250

> DO IT YOURSELF



STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces



COMPONENTS
<ul style="list-style-type: none"> Black brush 48x1100
OPTIONS
<ul style="list-style-type: none"> EPDM seal
AVAILABLE FINISHES
Profile and matching end-caps available in 7 finishes: aodized bronze, silver and black electro-plate, white Painted RAL 1013, white RAL 9010, brown RAL 8017

FIXED DRAUGHT EXCLUDER FOR ROLLING SHUTTER

SERIES UNIVERSAL

> 1375 > 1380 > 1350 > 1355 > 1360

1360

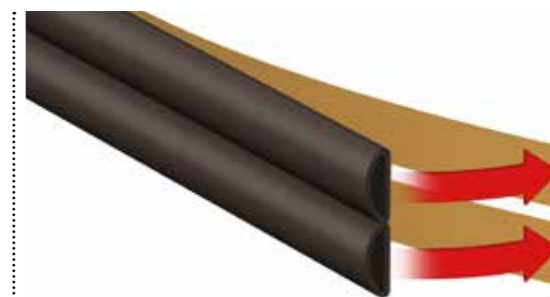


COMPONENTS

EPDM seal with adhesive

STANDARD PACKAGING: 50 mt

SILLS

1375

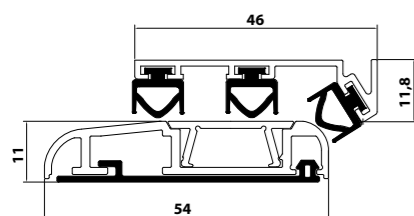

STANDARD SIZES:
cm. 43-53-63-73-83-93-103-113-123-133
STANDARD PACKAGING: 15 pieces


COMPONENTS

Silver anodised aluminium sill with a floor seal and hidden fastening
Silver anodised profile for door with 3 EPDM seal
2 head plates

OPTIONS

Special big section of seal for profile for door

1380




STANDARD SIZES:
cm. 43-53-63-73-83-93-103-113-123-133
STANDARD PACKAGING: 15 pieces

COMPONENTS

Aluminium sill combined with a draught excluder

FIXED DRAUGHT EXCLUDER

1350




STANDARD SIZES:
cm. 80-100-120
STANDARD PACKAGING: 15 pieces

COMPONENTS

Alluminium raw profile
EPDM seal

ADHESIVE SEALS

1355



STANDARD PACKAGING: 75 mt

COMPONENTS

EPDM seal with adhesive

STANDS AND PACKAGING



• Counter samples in WOOD, ALUMINIUM and PVC, useful for showing the functions, characteristics and fastening systems of all our draught excluders.



- Metal display 50cm wide with 6 hooks (10 items per hook when fully loaded)
- Metal display 100cm wide with 12 hooks (10 items per hook when fully loaded)



Via Industriale, 4/b - 25080 Muscoline (Bs) - Italy
Tel. +39 0365 373790
Fax +39 0365 371811
info@comaglio.it

WWW.COMAGLIO.IT
