

# SIMPLE SLEEK & ELEGANT





Dimensions are subject to change. Please refer to actual product for Glass preparation.




## STANDARD SLIDING DOOR SYSTEMS FOR GLASS GLASS DOOR SLIDING SYSTEM-44

OZ-SL-44-A1	Sliding System F	Roller for Glass Door	
	0	Specifications Roller Assembly • Four fiber reinforced plastic rollers of 30mm diameter • Stainless Steel Grade 304 glass holding point • Height adjustable glass holding points (10mm) • Secure grip for the door • Self aligning suspension of door • Roller configuration for even distribution of load • Independently connected rollers to prevent damage to track and rollers • Suitable for 10mm or 12mm glass • Suitable for door weight 40kg.	
OZ-SL-44-A1-W	Sliding System F	Roller for Wooden Door	
	0	<ul> <li>Specifications</li> <li>Sliding System 44 Roller for Wooden Doors</li> <li>Four fiber reinforced plastic rollers of 30mm diameter</li> <li>Supplied in pairs with floor guide</li> <li>Secure grip for the door</li> <li>Self aligning suspension of door</li> <li>Roller configuration for even distribution of load</li> <li>Independently connected rollers to prevent damage to track and rollers</li> <li>Suitable for door weight 60kg.</li> <li>Consists of: 2 Roller, 2 Stopper, 1 Floor Giude</li> </ul>	
OZ-SL-44-A2	Sliding System F	Roller for Glass Door	
	0	Specifications Roller Assembly • Heavy duty sliding door roller • Suitable for up to a door weight of 80Kgs. • Larger surface area for secure grip of the door • Adjustable threaded rod for installation perfection • Stainless Steel Grade 304	
OZ-SL-44-A10	Sliding System F	Roller for Glass Door	
	6	<ul> <li>Specifications <ul> <li>Roller for Glass Door</li> </ul> </li> <li>Four fiber reinforced plastic rollers</li> <li>Stainless Steel Grade 304 glass holding point</li> <li>Height adjustable glass holding points</li> <li>Secure grip of the door with 2 point holding</li> <li>Independently connected rollers to prevent damage to track and rollers</li> <li>Suitable for 10mm or 12mm glass</li> <li>Suitable for door weight 90 kg.</li> </ul>	
OZ-SL-44-A3	To Stop the Doc	r	
	0	<ul> <li>Specifications</li> <li>Door Stopper</li> <li>High grade plastic</li> <li>Secure grip of the door in both open and close condition</li> <li>Retards the speed of door at the ends</li> <li>Mounted inside the track</li> <li>Position easily adjustable</li> <li>Door does not moved of its own in the open or closed positions</li> </ul>	

# STANDARD SLIDING DOOR SYSTEMS FOR GLASS

GLASS DOOR SLIDING SYSTEM-44

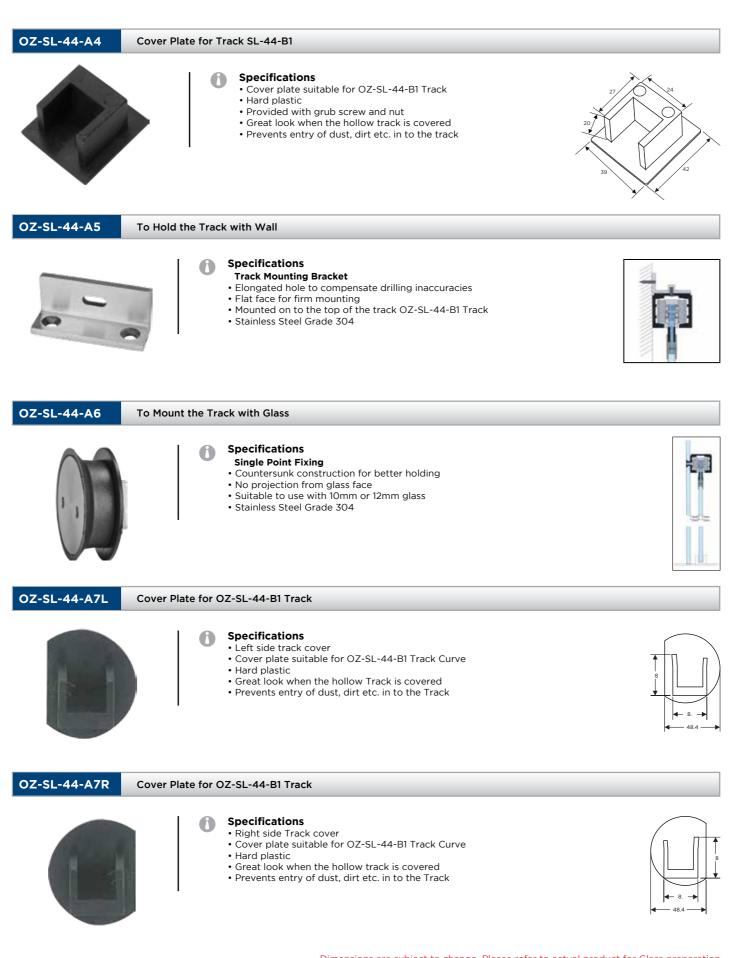

GLASSAGE

Dimensions are subject to change. Please refer to actual product for Glass preparation.



## STANDARD SLIDING DOOR SYSTEMS FOR GLASS GLASS DOOR SLIDING SYSTEM-44


OZ-SL-44-A8	Single 90° Track Connector
	<ul> <li>Specifications</li> <li>Mounted inside the track</li> <li>Position adjusted easily</li> <li>For OZ-SL-44-B1 Track</li> </ul>
OZ-SL-44-A9	Single Wall to Track Connector
	<ul> <li>Specifications</li> <li>High grade plastic</li> <li>Mounted inside the Track</li> <li>Position adjusted easily</li> <li>For OZ-SL-44-B1 Track</li> </ul>

OZ-SL-44-B1-Track Curved	SL-44-B1 TRACK with Round Profile Cover		
6	<ul> <li>Specifications         <ul> <li>Aluminium Anodized Track with Curved Cover</li> <li>Clipped on to track</li> <li>Available in 2mtr. &amp; 4mtr. length</li> <li>Pre-Drilled Holes in Track for Easy Fixation</li> <li>Can be installed only on wall mounted application</li> </ul> </li> </ul>		

C	DZ-SL-44-B1 SS-Track	SL-44-B1 TRACK with Stainless Steel Cover	
		<ul> <li>Specifications         <ul> <li>Aluminium Anodized Track with Stainless Steel Cover</li> <li>Available in 3mtr. length</li> <li>Stainless Steel Grade 304</li> </ul> </li> </ul>	

#### STANDARD SLIDING DOOR SYSTEMS FOR GLASS **GLASS DOOR SLIDING SYSTEM-44**

GLASSAGE

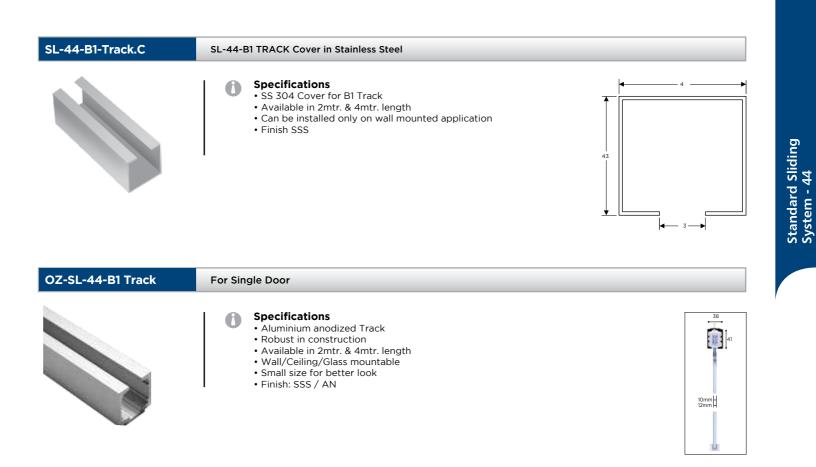

OZ-SL-44-B2 Track	For Double Doors		
	<ul> <li>Specifications         <ul> <li>Aluminium anodized Track</li> <li>Robust in construction</li> <li>Available in 2mtr. &amp; 4mtr. length</li> <li>For ceiling mounting</li> <li>Small size for better look</li> <li>Finish: SSS / AN</li> </ul> </li> </ul>		

#### OZ-SL-44-B3 Track

#### For Door & Fixed Glass



#### Specifications A

- Aluminium anodized Track • Robust in construction
- Available in 2mtr. & 4mtr. length
- For ceiling mounting
  Small size for better look
  Finish: SSS / AN



Dimensions are subject to change. Please refer to actual product for Glass preparation.