

JUNIOR OFFICE

Designed for demanding specifications, the accessories in the Junior Office range will give reliable service in busy environments. The range of locks, levers and hinges is wide enough to offer plenty of scope for design opportunities.

Lock Junior Office

40 – 42

Sets of levers

43

Hinges

43 – 45

Strike plate

Profile cylinder

Frame pivots

54 – 55

Applications

56 – 59

Special hinges

62 – 64

Door rails

65 – 67

Door bolts/Accessories

67 – 68

Mounting of door closers

69 – 70

Finishes and colours

71




TECHNICAL FEATURES

- Lock insert with low-noise “whisper” functionality as standard. The whisper latch (study metal latch – partially plastics-sheathed and damped latch motions for noise minimisation) satisfy particularly high expectations, including the requirements of government agencies and public authorities.
- Adjustable lever handle follower $\pm 1^\circ$, patent pending, for avoidance of “lever handle sag” (droop). Further on a special self-adjusting clamp follower holds the lever handle perfectly secure.
- The fully closed lock case provides optimum protection for the internal components which themselves are of rugged unit construction.
- Locks comply to the current DIN EN 12209. They are designed for use in public buildings.
- Moreover these locks were tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.
- Special versions of the fitting manufactured in high-grade corrosion-resistant materials are available for wet room applications.

LOCKS FOR LEVERS WITH ROSES

Complying to the current DIN EN 12209

Locks supplied as standard for 8 mm glass thickness / 24 mm rebate depth, 10 mm glass thickness / 26 mm rebate depth resp. Hinges page 53 – 55 (also to suit doors with no over-rebate and rebate depth 25 – 40 mm)

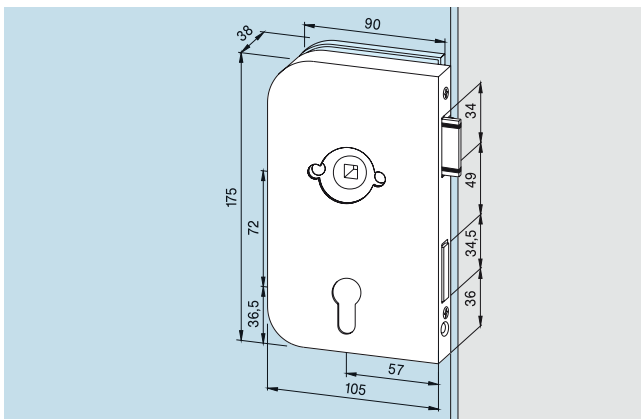


Lock,
prepared for Europrofile cylinder, nightlatch function, extended colour options, also available in brass or stainless steel

Art. No. 11.200 L (as illustr.)
Art. No. 11.201 R
Weight in kg: alumin. 1.214
brass 1.542
stainless steel 1.505


Lock,
prepared for Europrofile cylinder, nightlatch function, lock corrosion-resistant

Art. No. 11.210 L (as illustr.)
Art. No. 11.211 R
Weight in kg: alumin. 1.230

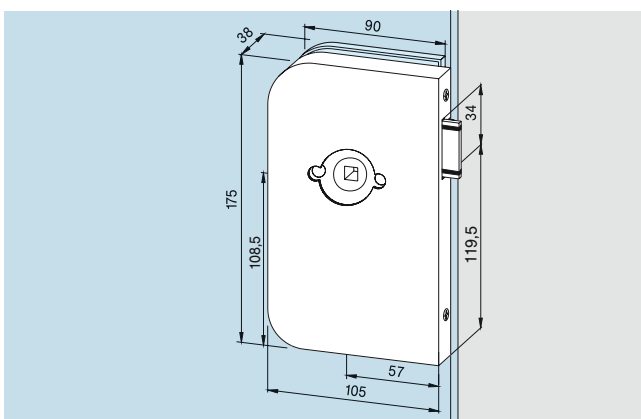


Lock,
non-locking, extended colours options, also available in stainless steel

Art. No. 11.212 L (as illustr.)
Art. No. 11.213 R
Weight in kg: alumin. 1.210
stainless steel 1.368

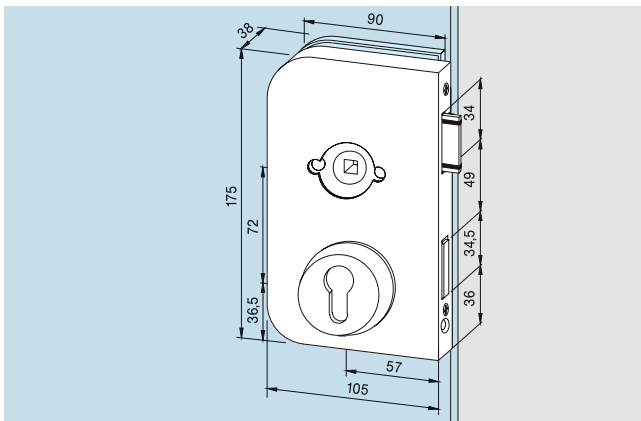

Lock,
prepared for Europrofile cylinder,
nightlatch function, cylinder rose
on lock side, extended colour
options, also available in brass

Art. No. 11.242 L (as illustr.)
Art. No. 11.243 R
Weight in kg: alumin. 1.200

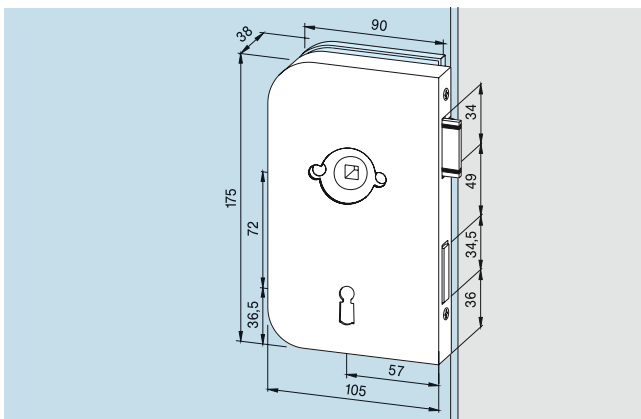


Lock,
lever lock, without nightlatch
function, 2 keys supplied, also
available in stainless steel

Art. No. 11.202 L (as illustr.)
Art. No. 11.203 R
Weight in kg: alumin. 1.115
stainless steel 1.383

Not illustrated:

Lock,
prepared for KABA, nightlatch
function

Art. No. 11.240 L
Art. No. 11.241 R
Weight in kg: alumin. 1.075

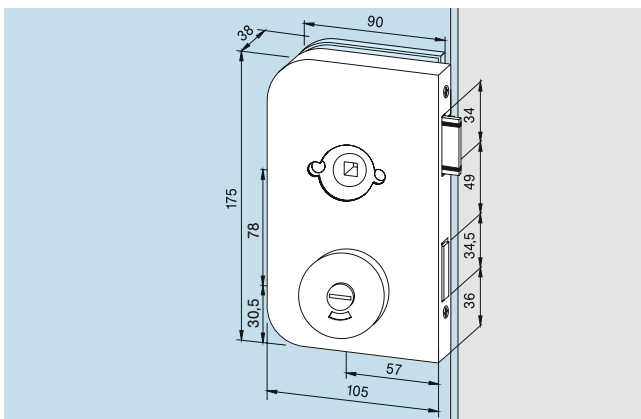


Lock,
bathroom lock function

Art. No. 11.204 L (as illustr.)
Art. No. 11.205 R
Weight in kg: alumin. 1.040

Lock,
bathroom lock function,
lock corrosion resistant

Art. No. 11.214 L (as illustr.)
Art. No. 11.215 R
Weight in kg: alumin. 1.210

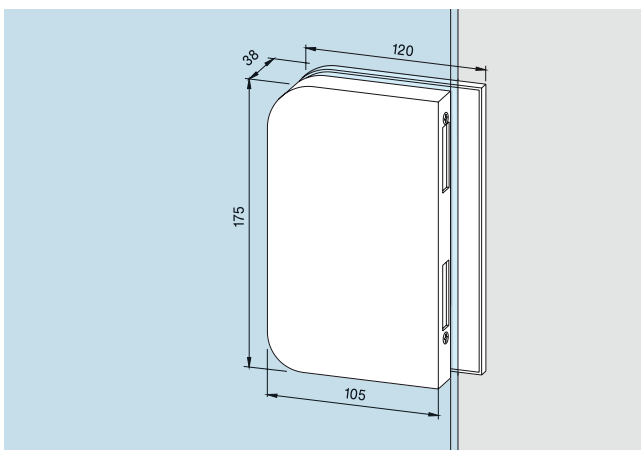

Strike box,
for pairs of doors, extended
colour options, also available in
brass

Art. No. 11.206 L (as illustr.)
Art. No. 11.207 R
Weight in kg: alumin. 1.019
brass 1.420
stainless steel 1.335


LOCKS WITH FOLLOWER

Complying to the current DIN EN 12209

Locks supplied as standard for 8 mm glass thickness / 24 mm rebate depth, 10 mm glass thickness / 26 mm rebate depth resp.


Prepared for all levers without roses with 8 mm square spindles, spindle length for 44 mm lock thickness and 18 mm \varnothing follower, max. 8 mm long.

Hinges page 53 – 55 (also to suit doors with no over-rebate and rebate depth 25 – 40 mm)

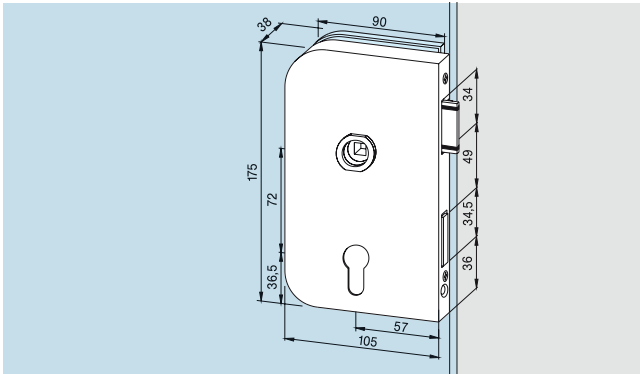

Lock,
prepared for Europrofile cylinder, nightlatch function, extended colour options, also available in brass or stainless steel

Art. No. 11.260 L (as illustr.)
Art. No. 11.261 R
Weight in kg: alumin. 1.165
brass 1.598
stainless steel 1.445

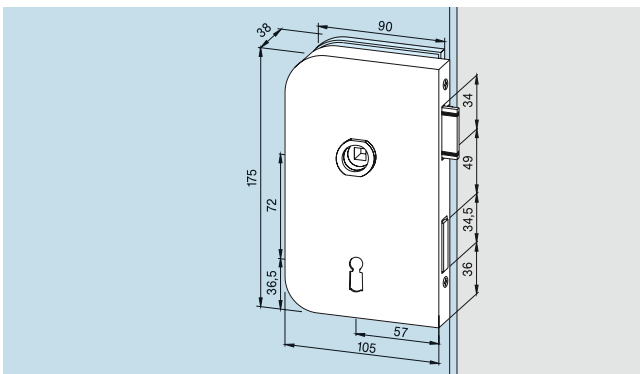


Lock,
lever lock, without nightlatch function, 2 keys supplied, also available in stainless steel

Art. No. 11.262 L (as illustr.)
Art. No. 11.263 R
Weight in kg: alumin. 1.115
stainless steel 1.383

Not illustrated:


Lock,
prepared for KABA, without nightlatch function, 2 keys supplied, also available in stainless steel

Art. No. 11.266 L
Art. No. 11.267 R
Weight in kg: alumin. 1.113
stainless steel 1.378

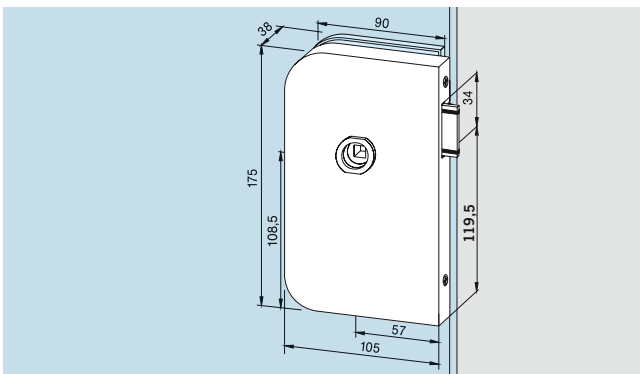

Lock,
non-locking, also available in stainless steel


Art. No. 11.264 L (as illustr.)
Art. No. 11.265 R
Weight in kg: alumin. 1.040
stainless steel 1.290

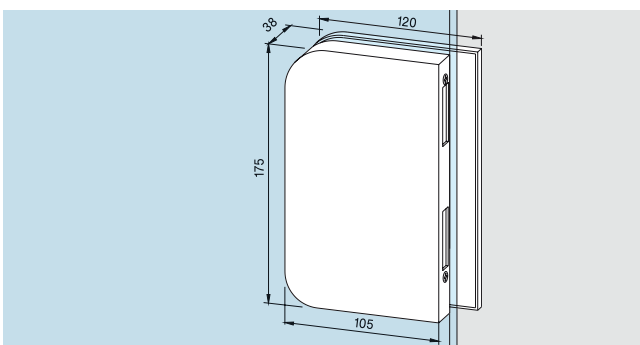


Strike box,
for pairs of doors, extended colour options, also available in brass

Art. No. 11.206 L (as illustr.)
Art. No. 11.207 R
Weight in kg: alumin. 0.945
brass 1.488
stainless steel 1.335


SETS OF LEVERS




Set of levers,
tubular, with roses
Art. No. 10.307
Weight in kg: alumin. 0.320

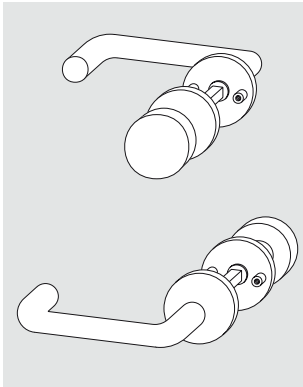


Lever and knob set,
tubular lever with fixed knob,
with roses
Art. No. 10.318
Weight in kg: alumin. 0.400



Lever and knob set,
tubular lever with knob,
with roses
Art. No. 10.319
Weight in kg: alumin. 0.400



Lever and knob set,
tubular lever with free turning
knob (turning without function)
Art. No. 10.316
Weight in kg: alumin. 0.335




Lever and knob set,
tubular lever with turning knob
Art. No. 10.317
Weight in kg: alumin. 0.345

Set of levers, tubular,
for follower
Art. No. 10.301
Weight in kg: alumin. 0.320
brass 0.450

Further sets of levers see pages 29, 34, 43, 51.

HINGES FOR /WITH FRAME PIVOTS

For 8 mm glass thickness / 24 mm rebate depth,
10 mm glass thickness / 26 mm rebate depth resp.,
max. door width 1000 mm

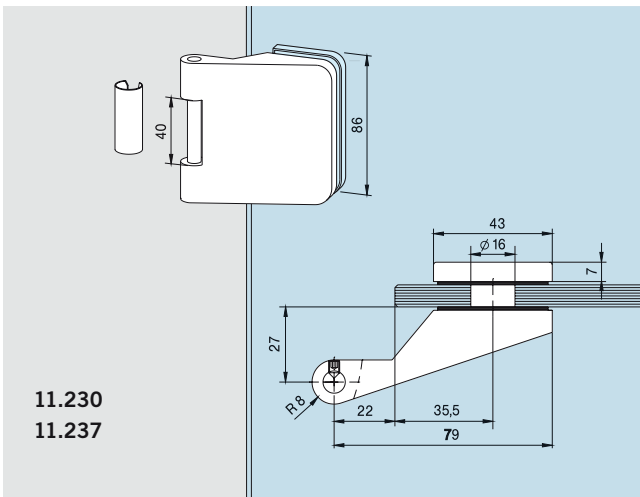

Hinge for frame pivot,
complete with sleeve, zinc plated
steel pin, door weight max. 55 kg

Art. No. 11.230*
Weight in kg: alumin. 0.358
brass 0.787

Hinge for frame pivot,
complete with sleeve, stainless
steel pin, to be used in damp
environments, door weight
max. 55 kg

Art. No. 11.237
Weight in kg: alumin. 0.360

Not illustrated:
Hinge for frame pivot,
complete with sleeve, to suit
rebate depth 25 – 39 mm,
door weight max. 45 kg,

Art. No. 11.245
Weight in kg: alumin. 0.530


Not illustrated:
Hinge for frame pivot,
complete with sleeve,
to suit rebate depth 40 mm,
door weight max. 45 kg

Art. No. 11.238
Weight in kg: alumin. 1.111

Not illustrated:
Hinge for frame pivot,
complete with sleeve and ball
bearing, door weight max.
60 kg, also available in brass
or stainless steel


Art. No. 11.234**
Weight in kg: alumin. 0.385
brass 0.792
stainless steel 0.493

* Finish satin stainless steel (700), not usable with screw-on frame pivot 11.405 (page 65)
** Finish satin stainless steel (700), not usable with screw-on frame pivot 11.406 (page 65)

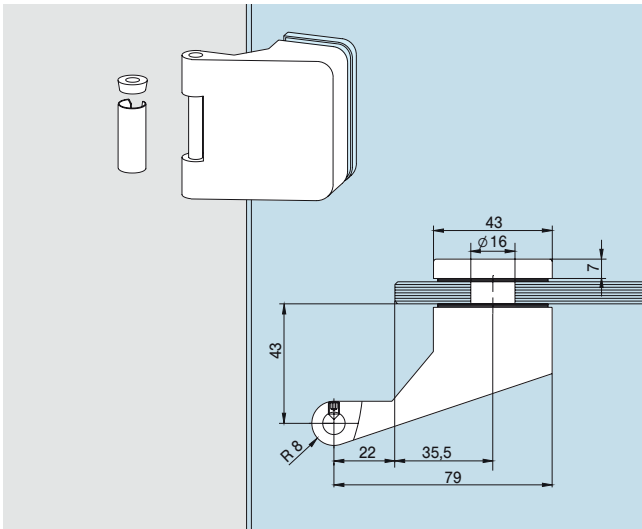


Hinge for frame pivot,
complete with sleeve, to suit
rebate depth 40 mm with steel
ball bearing, door weight
max. 45 kg

Art. No. 11.244
Weight in kg: alumin. 1.100

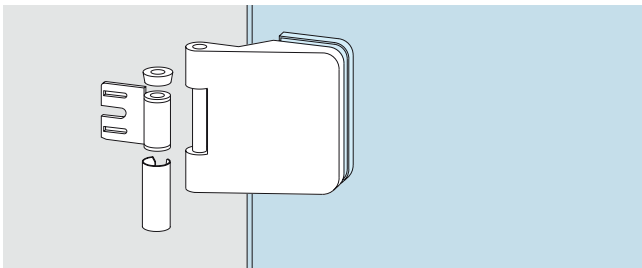


**Hinge with frame pivot
for steel frames,**
complete with sleeve, steel ball
bearing, door weight max.
60 kg, also available in brass or
stainless steel

Art. No. 11.231
Weight in kg: alumin. 0.423
brass 0.830
stainless steel 0.525

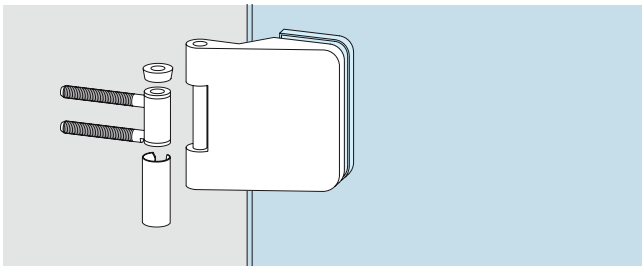


**Hinge with frame pivot
for wooden frames**
with sleeve, steel ball bearing,
door weight max. 60 kg, also
available in brass or stainless
steel

Art. No. 11.232
Weight in kg: alumin. 0.407
brass 0.840
stainless steel 0.505

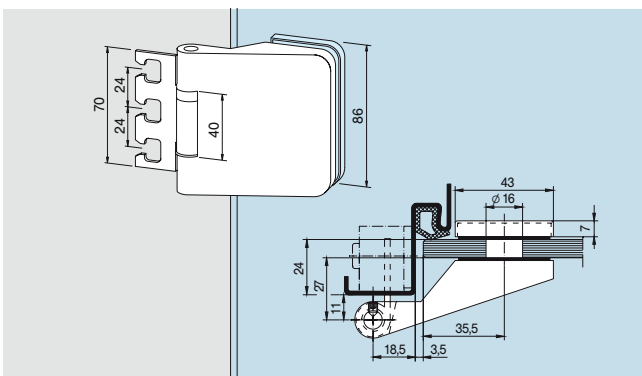

**Hinge with frame pivot
for steel frames**
with 120 mm type frame
pocket, complete with sleeve,
steel ball bearing, door weight
max. 60 kg, also available in
brass or stainless steel

Art. No. 11.247
Weight in kg: alumin. 0.435
brass 0.851
stainless steel 0.539

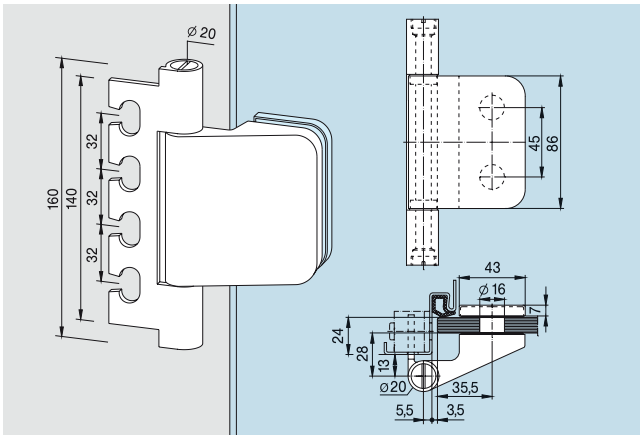


Hinge for project doors,
with 160 mm type frame pocket
(mating portion VN 7608/160 3D
or VZK 060-1/3), stainless steel
pin, plastic slide bearing
door weight max. 70 kg,
door width max. 1200 mm

Art. No. 11.233
Weight in kg: alumin. 0.519


Not illustrated:
do. for 40 mm rebate depth

Art. No. 11.340
door weight max. 45 kg

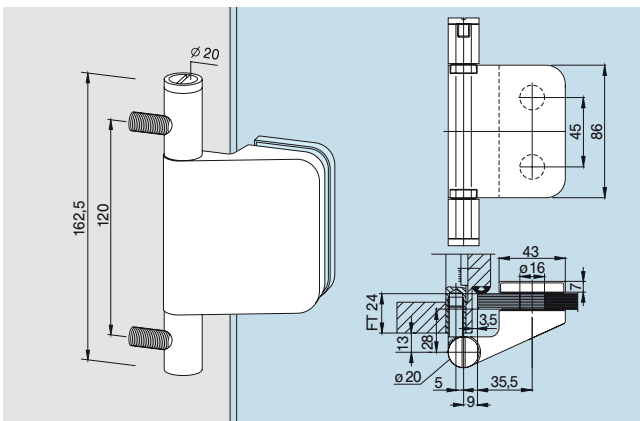


Hinge for project doors
with frame pivot for wooden
frames, zinc plated frame
pivots, zinc plated steel pin,
plastic slide bearing,
door weight max. 70 kg,
door width max. 1200 mm

Art. No. 11.298*
Weight in kg: alumin. 0.596

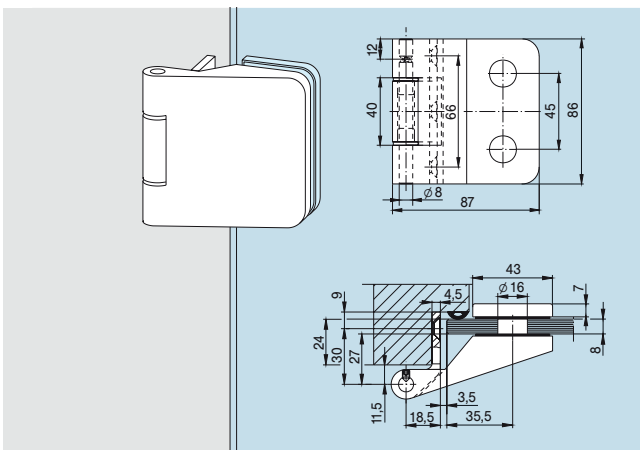

**Hinge with frame pivot
for wooden frames,**
hinge flap for mortising into
frame, zinc plated steel pin,
plastic bushing,
door weight max. 55 kg,

door width max. 1000 mm
Art. No. 11.239
Weight in kg: alumin. 0.425

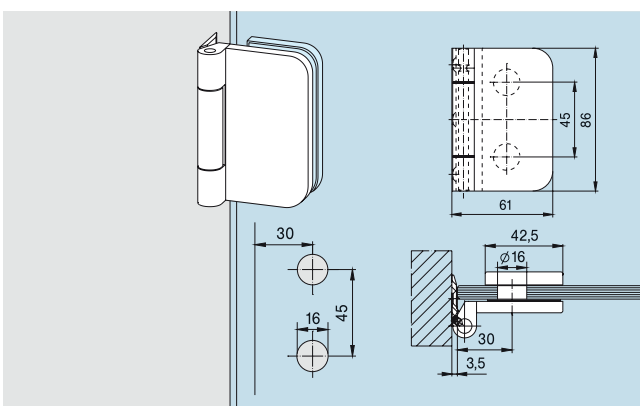

**Hinge with frame pivot
for non-rebated frames,**
hinge flap for screwing onto
frame, stainless steel pin,
plastic bushing,
door weight max. 40 kg,
door width max. 1000 mm

Art. No. 12.050
Weight in kg: alumin. 0.205

* Note: Consider separate frame processing